


### SPECIFICATIONS

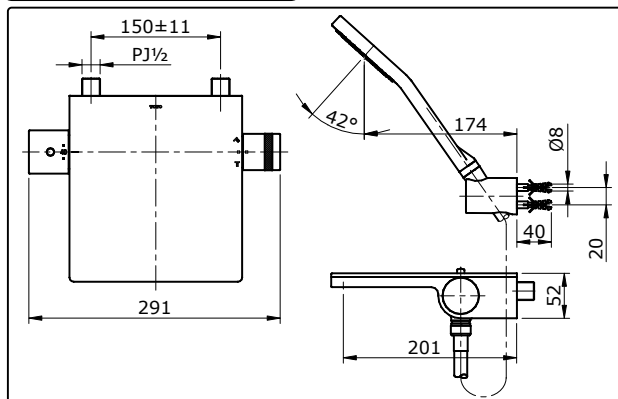



### OPERATING CONDITIONS

- Hot & Cold Water supply pressure :  
Minimum 0.05 MPa.  
Maximum 0.75 MPa.
- Hot water supply temperature shall be higher by 10°C. at least, than desired temperature of mixed water.  
(Recommendation: Hot water supply temperature =60°C)
- Hot water supply pressure shall be the same or lower than cold water supply .
- Ensure that water supply is clean ( No Sand, Dirt, Etc.).

### MAINTENANCE


Always wipe chrome plated area with dry soft cloth, and sometimes wipe it with cloth soaked in mild soap.

### INSTALLATION

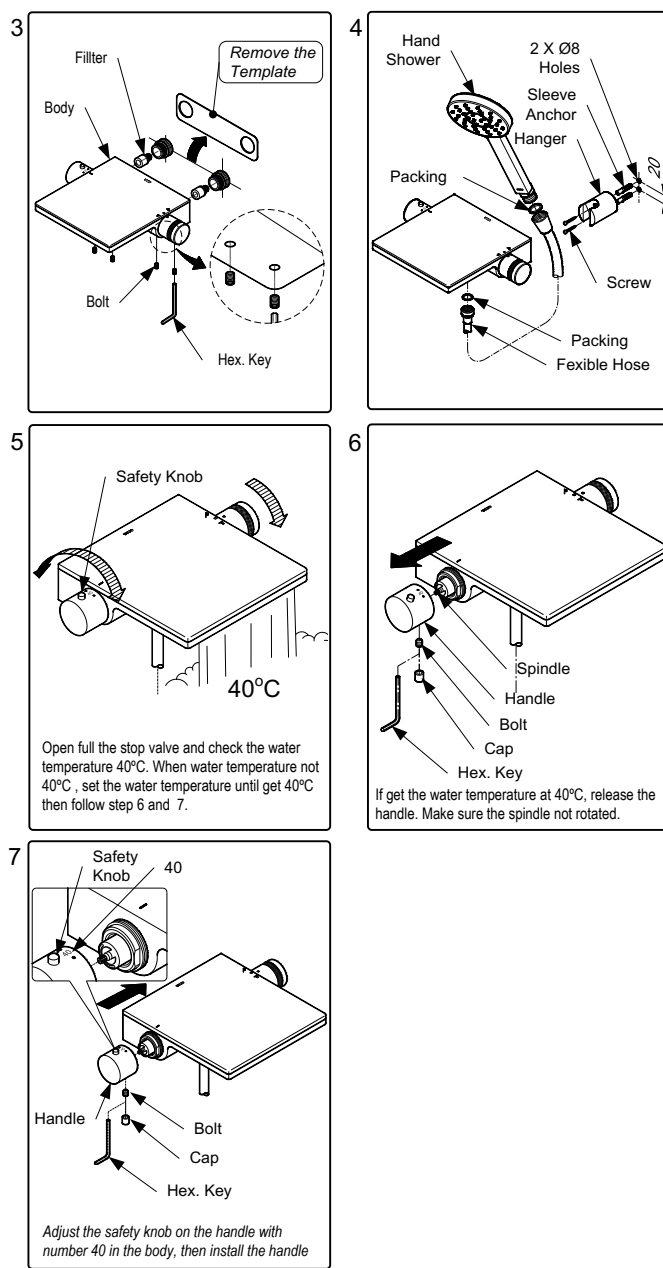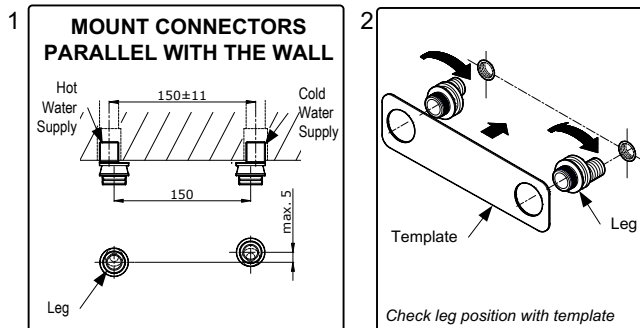

### TROUBLESHOOTING

PROBLEM	CHECK POINT	SOLUTION
Flow rate unsatisfactory	1, 2	Remove and clean
Water leaks around the handle	3, 4	Tighten
Handle is loose	5, 6	Tighten

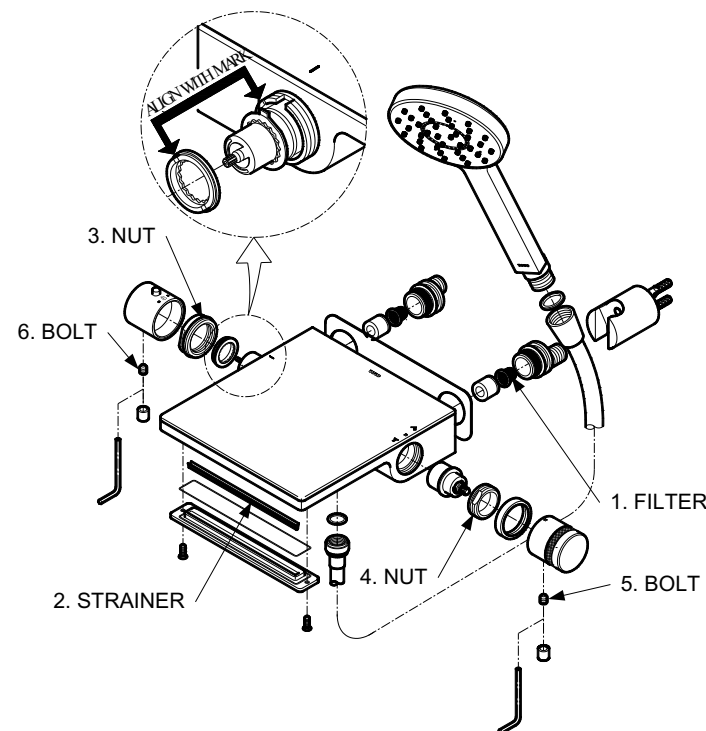

### ATTENTION

- Use of abrasive cleaning material such as; detergents containing hydrochloric acids, thinner, polishing powder, and nylon brush is not recommended
- Press safety knob turn left to increase temperature over 40°C.
- Please don't open the thermostat cartridge, because it cause to unbalance temperature in this product.